

Technical data sheet

Flat angle BRA FW 70110, rising

Item number: 6133281



Flat angle, rising, as a fitting for changing the direction of the Signa Style device installation trunking.
Solid fitting for attaching to the wall.



Alu Aluminium

EL Anodised

Master data

| | |
|---------------------|-------------------------------|
| Item number | 6133281 |
| Type | BRA FWS70110 EL |
| Description 1 | Flat angle |
| Description 2 | SIGNA STYLE rising 70x110 ano |
| Manufacturer | OBO |
| Dimension | 70x110x270 |
| Material | Aluminium |
| Surface | Anodised |
| Surface standard | |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 88.9 kg |
| Weight unit | kg/100 pc. |


Technical data sheet

Flat angle BRA FW 70110, rising

Item number: 6133281



Dimensions

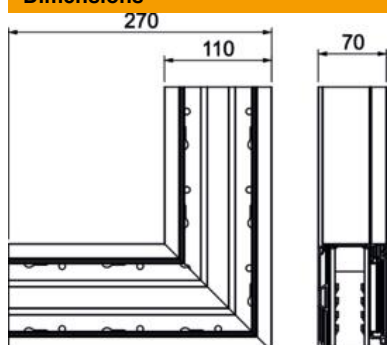

| | |
|--------|--------|
| Length | 270 mm |
| Width | 110 mm |
| Height | 70 mm |

Technical data

| | |
|-----------------------------------|-----------------|
| Number of covers | 1 |
| Version for | Base |
| for duct width | 110 mm |
| for trunking height | 70 mm |
| Halogen-free | yes |
| Cable retaining clip | no |
| Duct connector | no |
| Cover mounting type | Internal |
| Mounting perforation in base | yes |
| Cover width | 80 mm |
| Change of direction | Vertical rising |
| Protection rating | IP30 |
| Protective film | yes |
| Protection rating IK code | IK07. |
| Symmetrical | no |
| Permitted temperature range, max. | 60 °C |
| Permitted temperature range, min. | -5 °C |
| Angle range, min. | 90 mm |