


# Technical data sheet

Falling vertical bend for PYROLINE® Con S BSKH09-K1021  
fire protection duct  
Item number: 7215666



Falling vertical bend for PYROLINE® Con S fire protection duct, type BSKH09-K1021, consisting of fibreglass lightweight concrete which is resistant to water and frost for the creation of vertical changes of direction (45°) of the duct. Mounted connectors ensure quick mounting in situ, whilst loosely placed covers ensure quick inspection and reassignment.

Including connection screws and sealing strips.  
Including connection screws and sealing strips.



Fibreglass lightweight concrete

## Master data


|                     |                                 |
|---------------------|---------------------------------|
| Item number         | 7215666                         |
| Type                | BSKH09-VF1021                   |
| Description 1       | Vertical bend falling           |
| Description 2       | for BSKH09-K1021                |
| Manufacturer        | OBO                             |
| Dimension           | 105x210                         |
| Colour              | Grey                            |
| Material            | Fibreglass lightweight concrete |
| Smallest sales unit | 1                               |
| Unit of quantity    | Piece                           |
| Weight              | 1414 kg                         |
| Weight unit         | kg/100 pc.                      |

# Technical data sheet

Falling vertical bend for PYROLINE® Con S BSKH09-K1021  
fire protection duct  
Item number: 7215666



## Dimensions

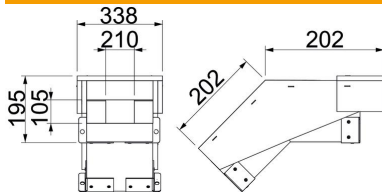

|                     |           |
|---------------------|-----------|
| External dimensions | 338 x 195 |
| Internal dimensions | 210 x 105 |
| Width               | 338 mm    |
| Dimension B         | 338 mm    |
| Dimension b         | 210 mm    |
| Dimension h         | 105 mm    |
| Dimension H         | 195 mm    |
| Dimension L         | 226 mm    |

## Technical data

|  |                                  |
|--|----------------------------------|
| Number of flammable sides                      | 4                                |
| Cover fastening                                | Loose                            |
| Fire resistance class E – function maintenance | 30                               |
| Fire resistance class I – installation duct    | 90                               |
| With perforation                               | no                               |
| Partitions possible                            | yes                              |
| Jacketing                                      | Without                          |
| Material of the insulation                     | Glass-fibre lightweight concrete |
| Angle of the bend                              | 45 °                             |