


Technical data sheet

Wiring trunking, type CABLIX 100150 S

Item number: 6132651

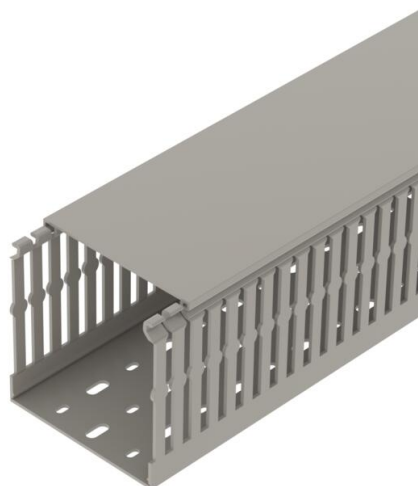

Wiring trunking, incl. cover and base perforation, for horizontal and vertical routing of electrical cables in the switchgear cabinet. Retainers are broken out without tools. Special lengths on request.
Tested to DIN EN 50085-2-3.
Base and cover in set.



PVC Polyvinylchloride

Master data

Item number	6132651
Type	CABLIX 100100 S
Description 1	Slotted cable trunking system
Description 2	CABLIX Set 100x100 7030
Manufacturer	OBO
Dimension	2000x100x100
Colour	Stone grey; RAL 7030
Material	Polyvinylchloride
Smallest sales unit	2
Unit of quantity	Metre
Weight	85.5 kg
Weight unit	kg/100 m


Technical data sheet

Wiring trunking, type CABLIX 100150 S

Item number: 6132651



Dimensions

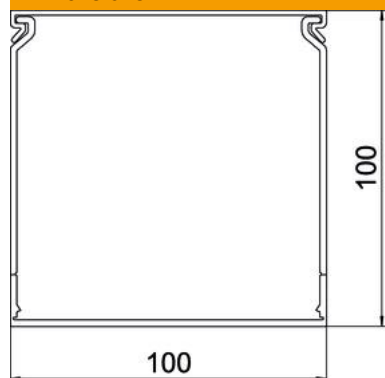

Length	2,000 mm
Width	100 mm
Height	100 mm

Technical data

Side wall version	Slotted
Fastening type	Base perforation
Flexible	no
Halogen-free	no
Creepage current-resistant	yes
With cover	yes
Usable cross-section	90.65 cm ²
Slot spacing	6.5 mm
Slot width	6 mm
Self-extinguishing	yes
Permitted temperature range, max.	60 °C
Permitted temperature range, min.	-5 °C