


Technical data sheet

CABLIX 80 wiring ducts, duct width 100

Item number: 6132645

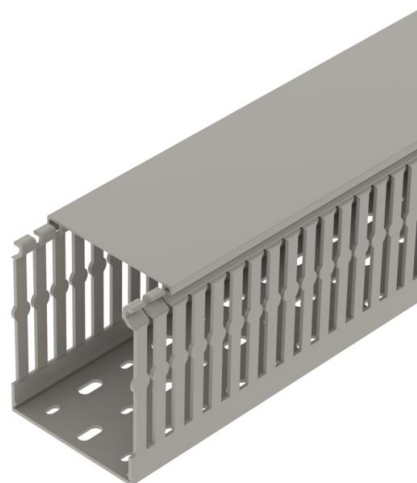

Wiring trunking, incl. cover and base perforation, for horizontal and vertical routing of electrical cables in the switchgear cabinet. Retainers are broken out without tools. Special lengths on request.
Tested to DIN EN 50085-2-3.
Base and cover in set.



PVC Polyvinylchloride

Master data

Item number	6132645
Type	CABLIX 10080 S
Description 1	Slotted cable trunking system
Description 2	CABLIX Set 100x80 7030
Manufacturer	OBO
Dimension	2000x80x100
Colour	Stone grey; RAL 7030
Material	Polyvinylchloride
Smallest sales unit	2
Unit of quantity	Metre
Weight	74.5 kg
Weight unit	kg/100 m


Technical data sheet

CABLIX 80 wiring ducts, duct width 100

Item number: 6132645



Dimensions

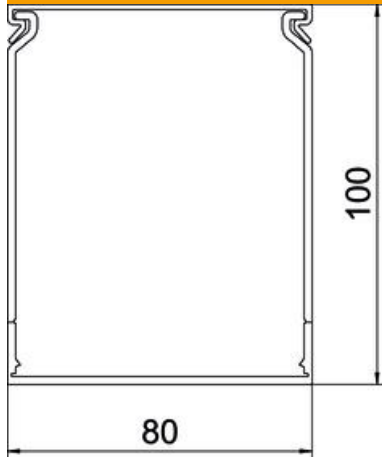

Length	2,000 mm
Width	80 mm
Height	100 mm

Technical data

Side wall version	Slotted
Fastening type	Base perforation
Flexible	no
Halogen-free	no
Creepage current-resistant	yes
With cover	yes
Usable cross-section	71.7 cm ²
Slot spacing	6.5 mm
Slot width	6 mm
Self-extinguishing	yes
Permitted temperature range, max.	60 °C
Permitted temperature range, min.	-5 °C