


Technical data sheet

Wiring trunking CABLIX 30, trunking width 80

Item number: 6132621

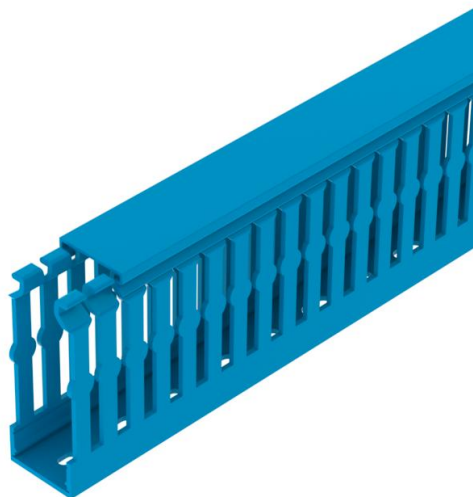

Wiring trunking, incl. cover and base perforation, for horizontal and vertical routing of electrical cables in the switchgear cabinet. Retainers are broken out without tools. Special lengths on request.
Tested to DIN EN 50085-2-3.
Base and cover in set.



PVC Polyvinylchloride

Master data

Item number	6132621
Type	CABLIX 8030 BL
Description 1	Slotted cable trunking system
Description 2	CABLIX Set 80x30
Manufacturer	OBO
Dimension	2000x30x80
Colour	Blue
Material	Polyvinylchloride
Smallest sales unit	2
Unit of quantity	Metre
Weight	45.5 kg
Weight unit	kg/100 m


Technical data sheet

Wiring trunking CABLIX 30, trunking width 80

Item number: 6132621



Dimensions

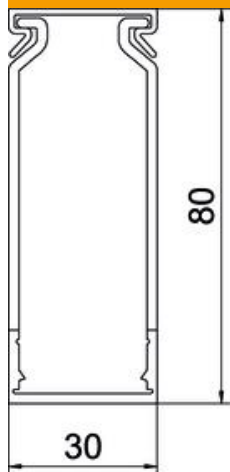

Length	2,000 mm
Width	30 mm
Height	80 mm

Technical data

Side wall version	Slotted
Fastening type	Base perforation
Flexible	no
Halogen-free	no
Creepage current-resistant	yes
With cover	yes
Usable cross-section	15.4 cm ²
Slot spacing	6.5 mm
Slot width	6 mm
Self-extinguishing	yes
Permitted temperature range, max.	60 °C
Permitted temperature range, min.	-5 °C