


Technical data sheet

Height compensation set (215-270 mm) for UZD250-3 with height 165–220 mm

Item number: 7410158

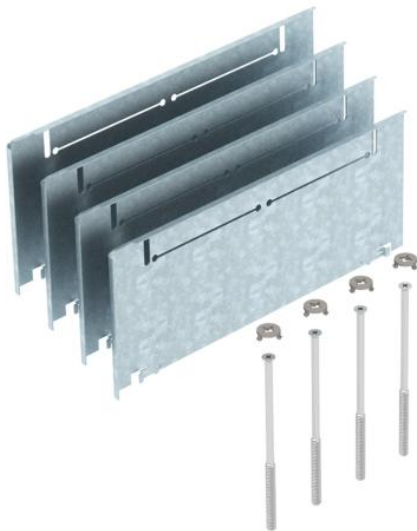

Height compensation set for underfloor boxes UZD250-3 with a construction height of 165 to 220 mm for construction stacking of the UZD to a height of 215-270 mm, consisting of four fall plates, four height adjustment screws and four rotary locks.



St Steel

FS Strip galvanized

Master data

| | |
|---------------------|----------------------------|
| Item number | 7410158 |
| Type | ASH250-3 215270 |
| Description 1 | Height construction set |
| Description 2 | for screed height 215+55mm |
| Manufacturer | OBO |
| Material | Steel |
| Surface | Strip galvanized |
| Surface standard | DIN EN 10346 |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 85 kg |
| Weight unit | kg/100 pc. |

Technical data sheet

Height compensation set (215-270 mm) for UZD250-3 with height 165–220 mm



Item number: 7410158



Dimensions



| | |
|-------------|--------|
| Dimension A | 330 mm |
| Dimension B | 80 mm |
| Dimension I | 212 mm |



Technical data

| | |
|---|--------|
| Version for | Square |
| Floor plate | no |
| Lowerable to be flush-floor | no |
| Seal installation option | no |
| Installation opening for on-floor tank | no |
| Decouplable | no |
| Screed height, max. | 270 mm |
| Screed height, min. | 215 mm |
| For pipe connection | no |
| Suitable for raised floor installation | no |
| Suitable for screed-flush closed underfloor ducts | no |
| Suitable for screed-covered underfloor ducts | yes |
| Suitable for cavity floor installation | no |
| Suitable for underfloor ducts | no |
| Trunking width, max. | 250 mm |
| Trunking width, min. | 190 mm |
| Height-adjustment range, max. | 270 mm |
| Height-adjustment range, min. | 215 mm |